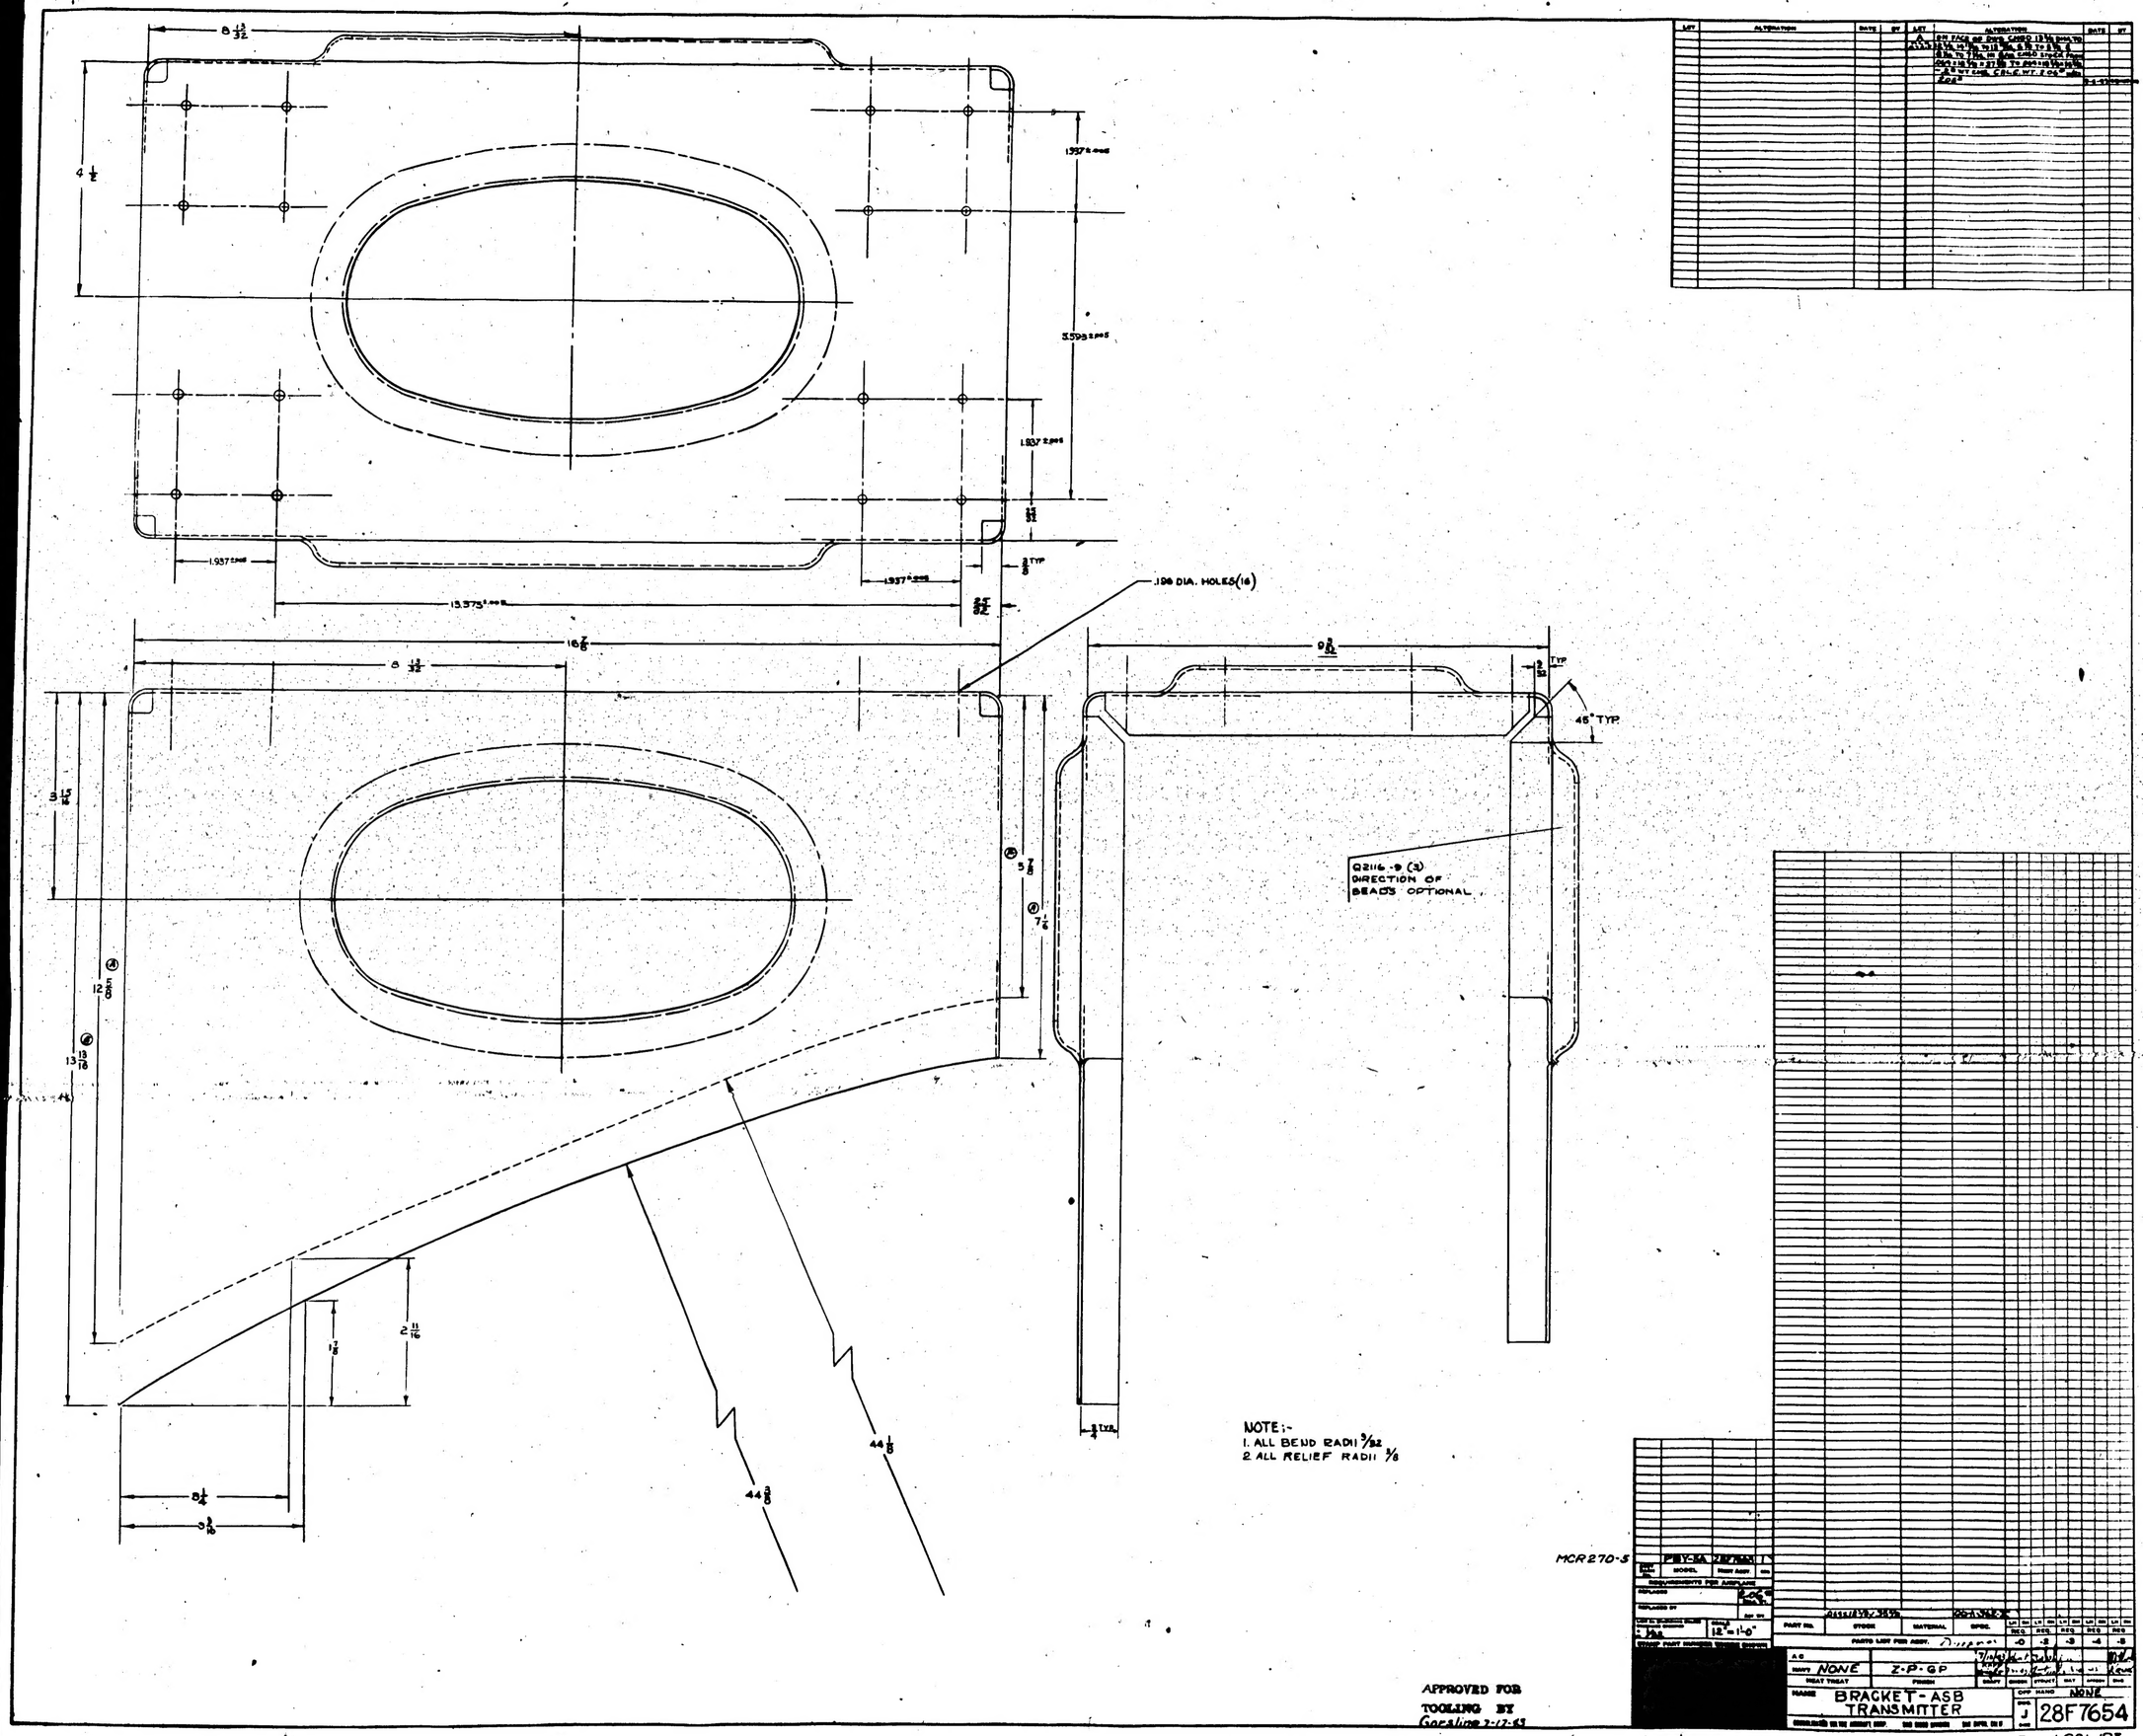
.198 DIA. HOLES(16)
Q2116-9 (3)
DIRECTION OF
BEADS OPTIONAL
45° TYP.
NOTE:-
1. ALL BEND RADII 3/32
2. ALL RELIEF RADII 3/8
APPROVED FOR
TOOLING BY
Gorsline 2-12-63
MCR270-5
NONE
Z-P-GP
BRACKET-ASB
TRANSMITTER
J
28F7654
NONE
28F7654
R

H 428